


Network terminal will offer you efficient way to manage your store with the function to send sales report automatically

The perfect blend of form and function! This versatile register offers high-performance features in a stylish, compact body. Ideal for retail formats ranging from small kiosks to large food courts.



Sales information is transmitted to a designated upstream server via a LAN during ordinary tenant checkout operation. Data transmission is supported by an FTP client and server function. Product masters and other settings data can be updated as necessary. Data transmission via the Internet is also supported.

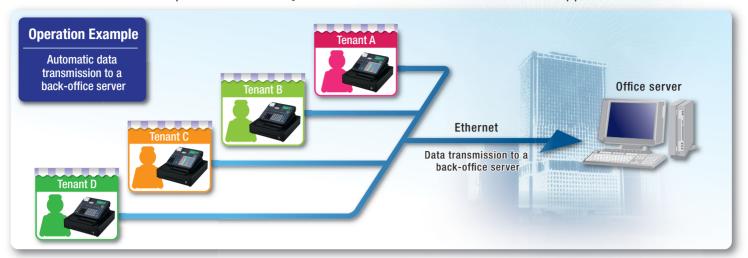

Display

The LCD operator display, backlit for ease of viewing, displays transactions on 2 lines of text in up to 16 characters and individual item amounts in 7-segment digits. To enhance

customer convenience, a pop-up swivel customer display comes as a standard feature.



■ Receipt and journal printer

Comes standard with a 58 mm thermal printer that prints up to 14 lines per second equipped with an auto cutter for receipts. Features include printing of graphic logos and watermarks and two printing modes: double- height mode for

receipts and compressed mode for journal printing. Drop-in paper loading facilitates paper roll change.



■ Barcode reading

To enhance customer service, an optional scanner is available for quick, accurate registration of barcoded items. A function for direct entry of "Not found" items enables immediate registration of new items, eliminating time-consuming searches for new item information.

■ Flexible drawer installation

The cash drawer can be located separately if required.

■ A multipurpose tray comes as a standard feature




■ Communication ports

Three RS232c comports for a slip printer, external printer, scanner, or scale (varies by region) and one Ethernet (RJ45) port are available.


■ Reports

Flash reports can be issued for quick read-out of up-to-date sales amount during business hours. Various reports are available to further support your business.



Options

- Spill-proof cover for SE-S6000 (WT89)
- Stroke keyboard cover for SE-C6000 (WT90)
- Flash ROM pack (RAC-12B)





Combination keyboard model with 72 flat PLU keys



Specifications

Models		SE-S6000	SE-C6000
Type of keyboard		Stroke	Combination
Display	Operator	LCD with backlight 2 lines x 16 characters / 10 digits x 7 segments	
	Customer	Pop-up 8-digit numeric LED	
Printer	No. of sheets	2	
	Printing method	Thermal printer	
	Printing speed	14 lines/sec. (max.)	
	Auto cutter	Receipt auto cutter	
	Paper width	58mm +0/-1mm x 80φ	
Drawer type (M: medium size)		Medium size (M)	
Memory backup		Memory backup : Lithium vanadium rechargeable battery / Approx. 90-day backup	
No. of RS232c ports		3	
Power source		Official (nominal) voltage and frequency	
Power consumption		AC 120v 0.5A / AC 220V~240V 0.33A	
Operating temperature		0 to 40℃	
Operating humidity		10-90% RH	
Dimensions and weight		With M drawer: 400 (W) x 450 (D) x 245 (H) mm / Approx. 10 kg	

Note: Specifications and design are subject to change without notice.



