


KF-1300

Digital Advertising Display



FEATURES

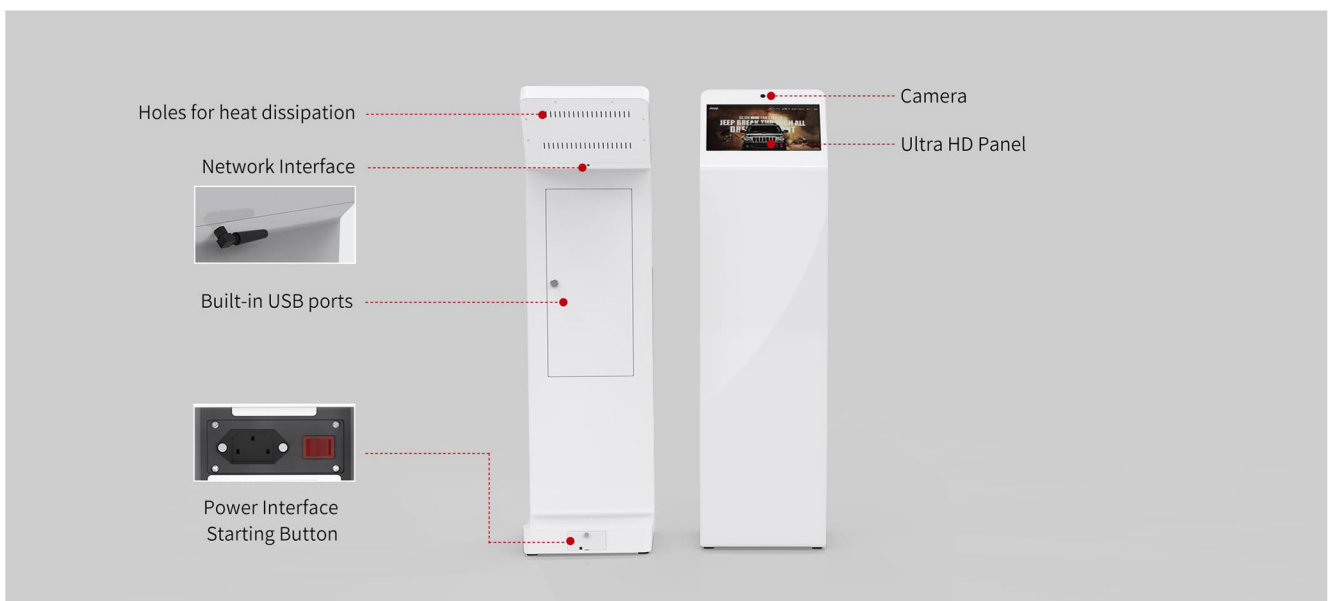



- The multi-point infrared touch technology support powerful interactive features and applications are wider.



- Camera



- Holes for heat dissipation




- Connector

APPLICATIONS




SPECIFICATIONS

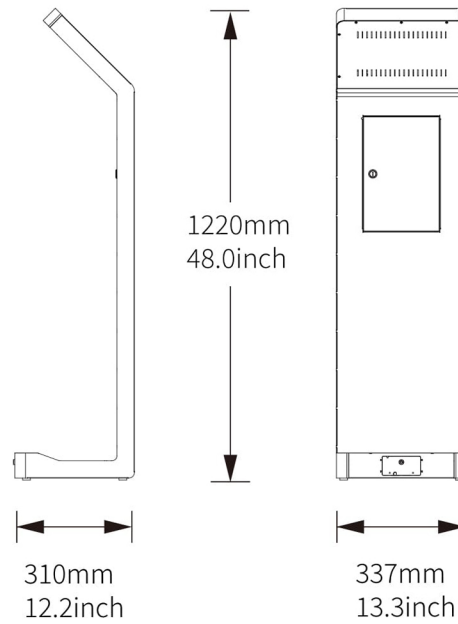


System			
OS Support	WIN 10 (trial version)	Android 7.1	
CPU	Intel Celeron J1900 Quad-core 2G	RK3288 Cortex-A17 quad-core 1.8GHz	
System Memory	4G	2G/4G	
Disk	64G/128G/256G(SSD)	8G/16G/32G/64G	
Interface			
Interface	USB*2	USB*2	
Network	WIFI	WIFI	
Touch Screen			
Type	Projective Capacitive Touch (10 points)	Response time	10ms
LCD			
Type	TFT-LCD	Contrast Ratio	800 : 1
Screen size	13.3"	Response Time	30ms
Max Resolution	1920 x 1080	Viewing Angle	H170° V170°
Aspect Ratio	16 : 9	Display Colors	262k
Brightness	300cd/m ²	Refresh Rate	60Hz
Panel Life	15000 hours		
Power			
Voltage	100-240VAC,50/60HZ	Power Consumption	<30W
Enclosure			
Material	SPCC	Surface	Powder coating
Overall Size (mm)	337 x 310 x 1220		
Package (mm)	1340 x 430 x 457		
Net Weight	23.5kg		
Gross Weight	28.5kg		
Application			
Working Temperature	0~40°C	Storage Temperature	-20~60°C
Working Humidity	20%~80%	Storage Humidity	10%~90%
Application	indoor		

Assembly & Installation


Operating Instructions

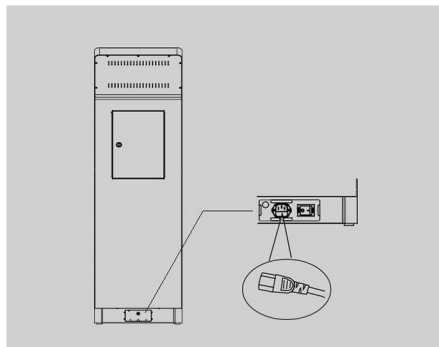

Please ordering kiosk at desired location and connect the power cord.

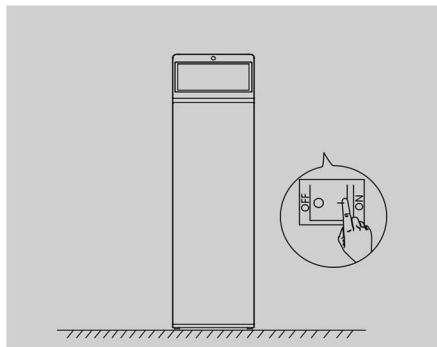


Press the starting button for booting.

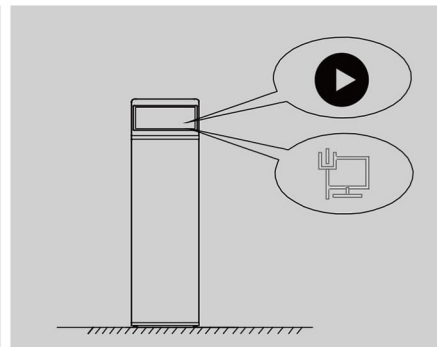

Install the multimedia playing terminal software, set the network parameters. (Mark: Support timer switch, remote shutdown and wake on LAN.)

Packing List



Product
x1




Key
x2




Power Cord
x1



Fuse Tool
x1



User Manual
x1



WiFi
x1