


27" INFORMATION KIOSK

KF-2700

- 27 inch screen, 10 points PCAP
- Support Ethernet and WIFI
- Option: 21.5 inch monitor, camera, scanner, payment holder



FEATURE

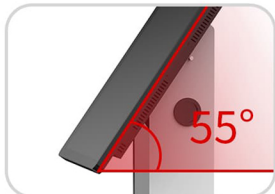

55 Degrees Viewing Angle

Enhance visual effects and make it more comfortable for touch operation



Cable Cover

Keep wires and switches from being damaged in public



27" Touchscreen

Landscape or portrait mounting



Lockable Compartment

For internal hidden routing cables and placing adapters and small tools



VESA Mounts

75×75/100×100



Routing Holes



Suitable For Various Commercial Environments

With slim and straight line design and classic black & white color matching , KF-2700 looks stylish, generous, and full of fashion sense. Constructed with durable industry heavy-duty steel, compatible with 27" high-definition touch screen display(optional in 21.5"), and embeded an industrial motherboard, KF-2700 supports 24/7 operation with stable and durable usage. It is widely used in various commercial environments, such as exclusive shops, art exhibition halls, enterprises, exhibitions, schools and other places.



Portrait or Landscape

The touch screen display and stand are seperable with standard vesa mounting holes 75x75/100x100 . Support both Portrait and landscape mounting.




More Details For Friendly User Experience



The interfaces of touch screen display are designed with a cable management cover to protect the switch and wiring to prevent manual plugging or damage. There are wiring holes at the upper and lower ends of the stand. Inside the stand body, it is a lockable hidden compartment with horizontal partitions, wiring holes, etc. In addition to being used for internal wiring and cables protecting, it can also be used as a small storage space for storing power strips, adapters, small tools, etc, to facilitate daily maintenance.




CABLE ROUTING

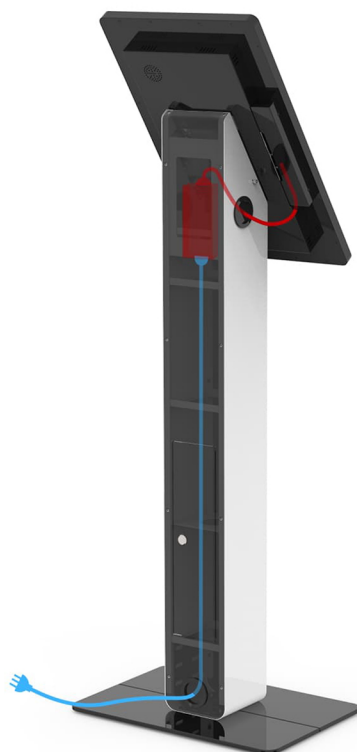

APPLICATION

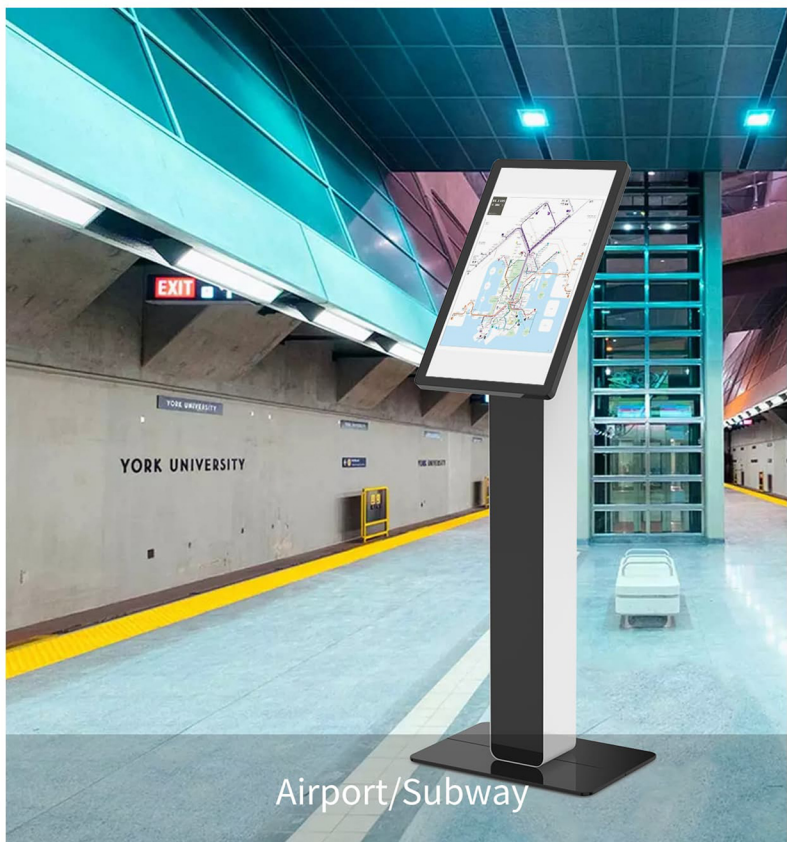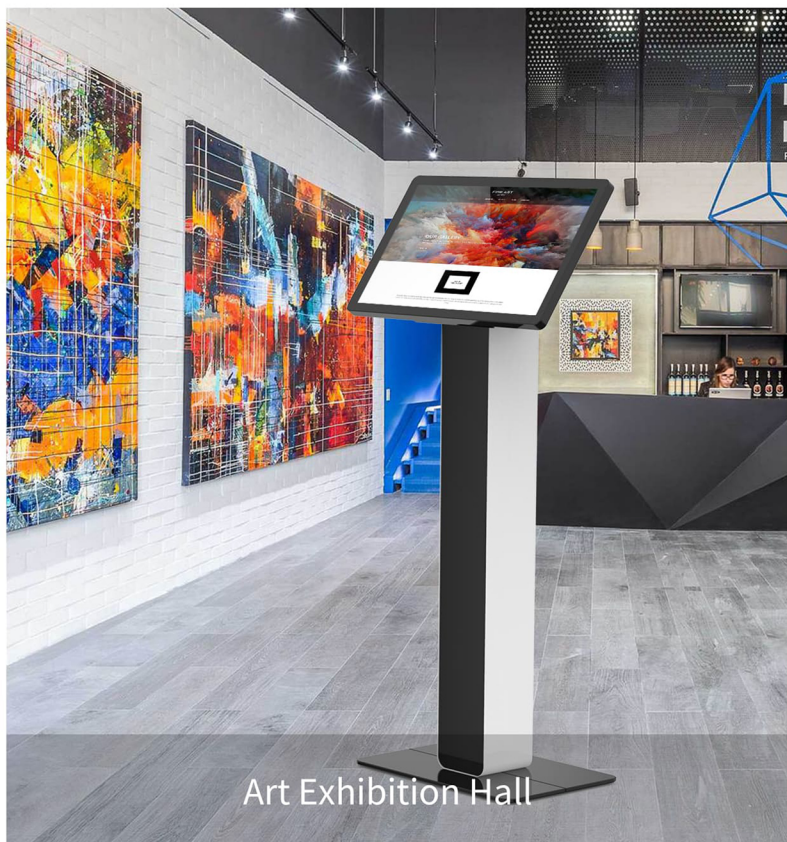

SPECIFICATIONS

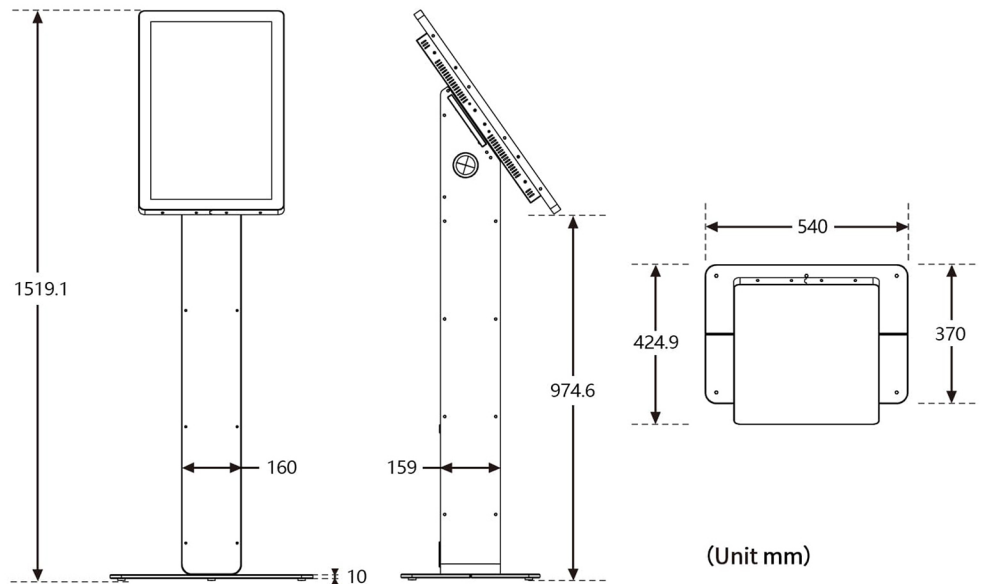

OS Support			
Operating System	WIN10 (trial version)	Android 7.1	
CPU	Intel Celeron J1900 Quad-core 2G	RK3288 Cortex-A17 Quad-core, 1.8 GHz	
System Memory	4G	2G/4G	
Disk	64G/128G/256G(SSD)	8G/16G/32G/64G	
Interface			
Speaker	5W*2	5W*2	
Interface	USB*4/RJ45*1	USB*2/RJ45*1	
Network	Ethernet/WIFI	Ethernet/WIFI	
Touch screen			
Type	PCAP 10 points	Response time	10ms
LCD			
Type	TFT-LCD	Contrast Ratio	3000:1
Screen Size	27"	Response time	12ms
Max Resolution	1920x1080	Viewing Angle	H178° V178°
Aspect Ratio	16:9	Display Colors	16.7M
Brightness	300cd/m2	Refresh Rate	60Hz
Panel Life	30000 hours		
Power			
Voltage	100-240VAC , 50/60HZ	Power Consumption	<50W
Enclosure			
Material	SPCC	Surface	Powder coating
Overall Size (mm)	540×370×1315mm(stand) 540×425×1519mm (kiosk-27 inch monitor)	Net Weight	26.9kg (stand) 35.4kg (kiosk-27 inch monitor)
Package (mm)	1400×405×340mm (stand) / 770×220×570mm (27 inch monitor)		
Gross Weight	36kg (stand) / 11.5kg (27 inch monitor)		
Application			
Working temperature	0~40°C	Storage temperature	-20~60°C
Working humidity	20%~80%	Storage Humidity	10%~90%
Application	Indoor		

INSTALLATION

