

27" Self-checkout Kiosk KR-2700


- 10 points PCAP touch
- Built-in printer/scanner/camera
- Support ethernet & WiFi
- Application: floor standing /wall-mounting



Floor standing ▶

▲ Wall-mounting

FEATURES

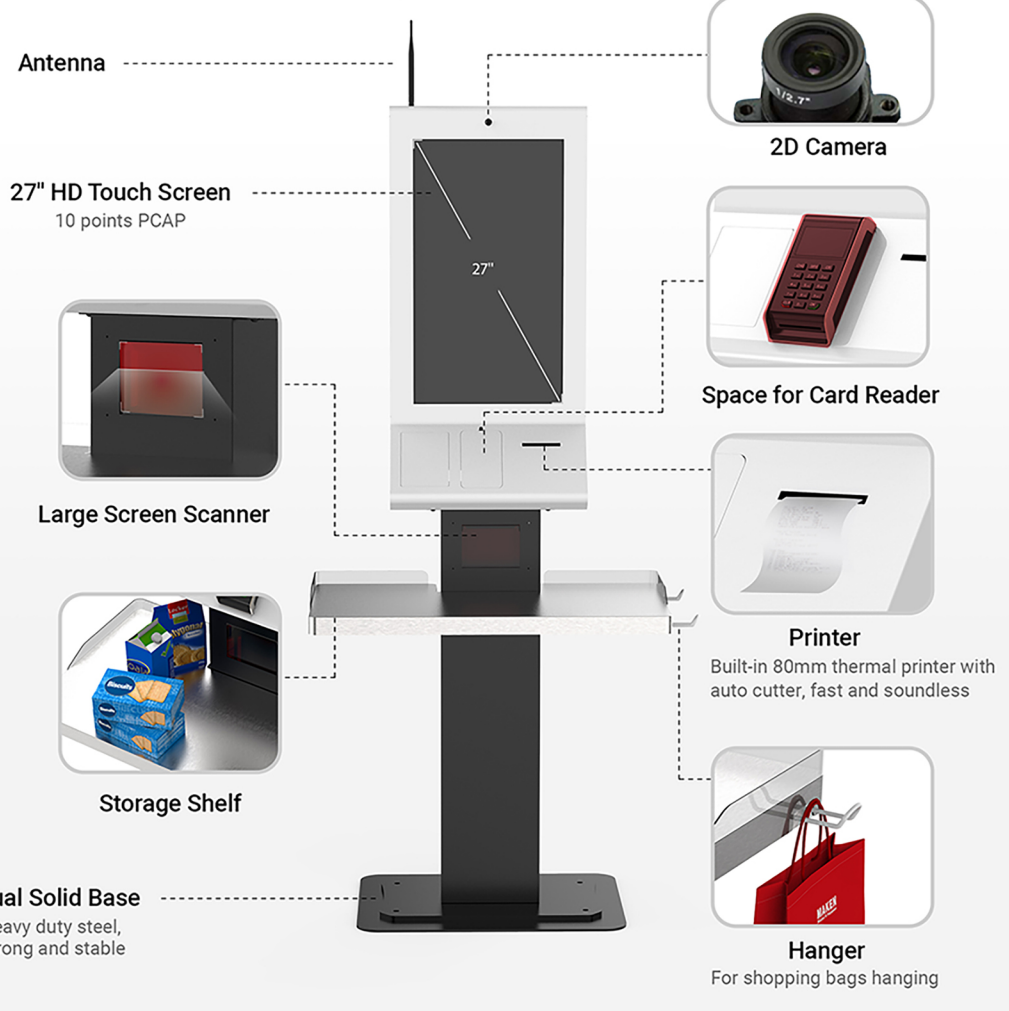

Compact Configuration Space Efficient

Compact self-checkout kiosk KR-2700, is combined with 27" HD touch screen, built-in large screen scanner, printer, and high camera, offering free efficient self-checkout service.

State-of-the-art sheet metal fabricated body of the kiosk, with compact configuration and space efficient, is very suitable for medium and small supermarkets, retail shops, or commercial space with limited space.


The stylish design of KR-2700, it not only relieve the pressure of queuing and crowded customers flow, offering excellent checkout experience; but also creates more economic benefits for labor cost reduction and efficiency improvement.



HD Touch Screen 10 Points Touch

27" HD original commercial screen, configured with 1920x1080 high resolution and 178° viewing image, offers users comfortable visual experience.

10 points capacitive touch and 10ms fast response, support kinds of gestures by point or slide touch with nice checkout experience.

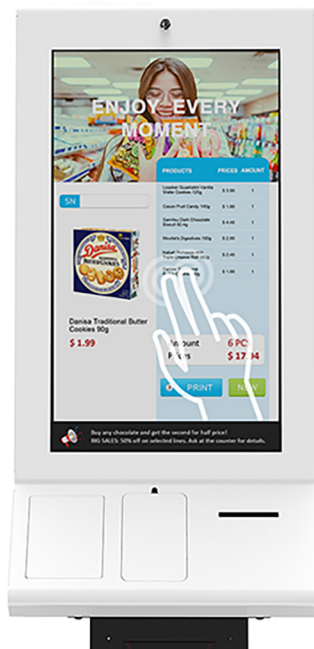


Support kinds of gestures

Large Scanning Space High Efficient Checkout

Large space designed in the middle of checkout kiosk, is helpful for comfortable checkout.

Large vertical scanner, supports skimming and induction scanning, and is very sensitive to read all kinds of barcode and QR code on presswork or mobile phone.

Brushed stainless steel storage platform, 30kg bearing capacity, equipped with dual hangers on right side for shopping bags hanging, is convenient for fast checkout and packing at a time.

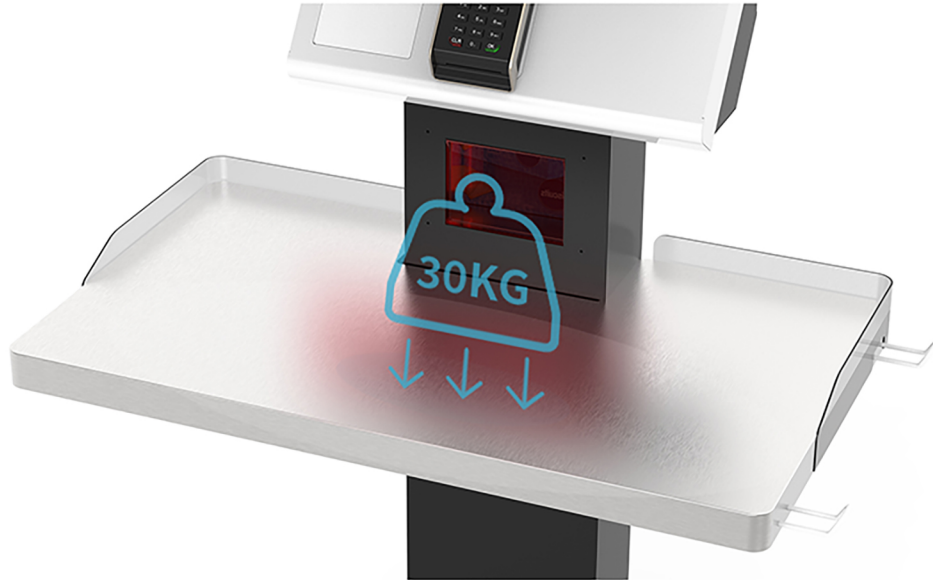


Electronic Modularization Easy Maintenance

All the interior electronic devices are modularized design under well organized, in safety and neat. In case of upgrade or after-sales maintenance, each module can be replaced directly and easily.

The screen metal structure is designed with side lockable door, for easy printing paper change and daily maintenance.


The interior of the stand, reserves space for cable hidden routing, and also storage space for small elements, such as sockets, gloves, tools and accessories etc.

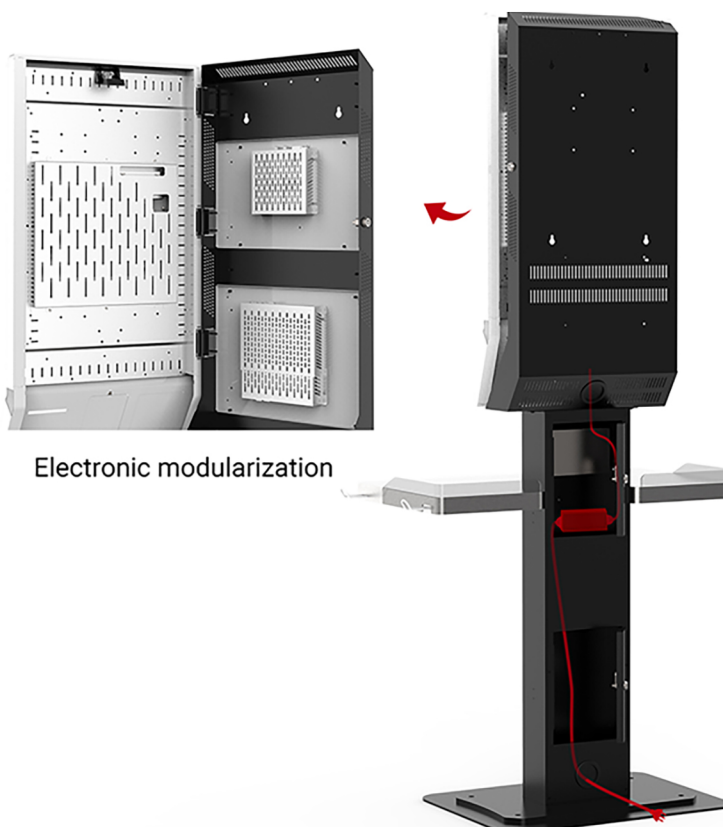


Electronic modularization

MOUNTING OPTIONS

The stand part of the kiosk comes with a small base while there is a big independent base in the package, which offer two kinds of floor standing option.

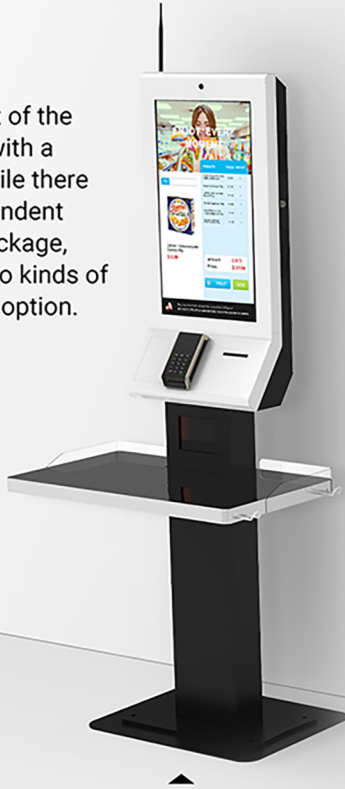


Floor standing against the wall: Screw small base to the floor, and screw the top wall-fixed plate to the wall.

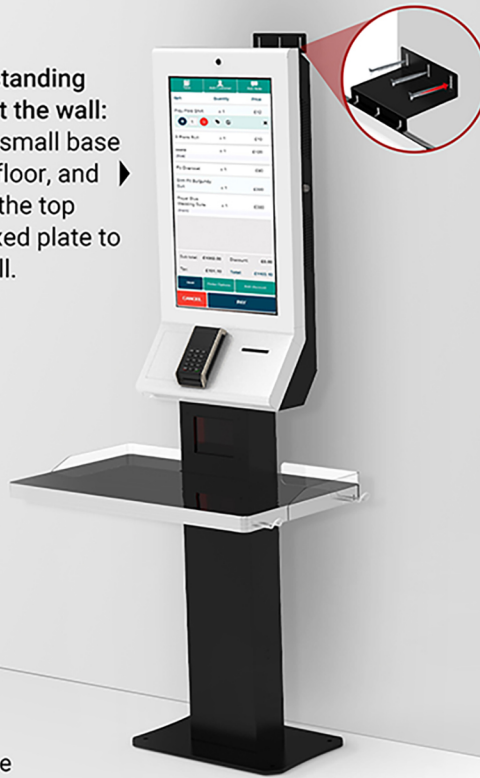


Wall Mounting

Floor standing at anywhere: Screw the small base to the big independent one.

APPLICATIONS

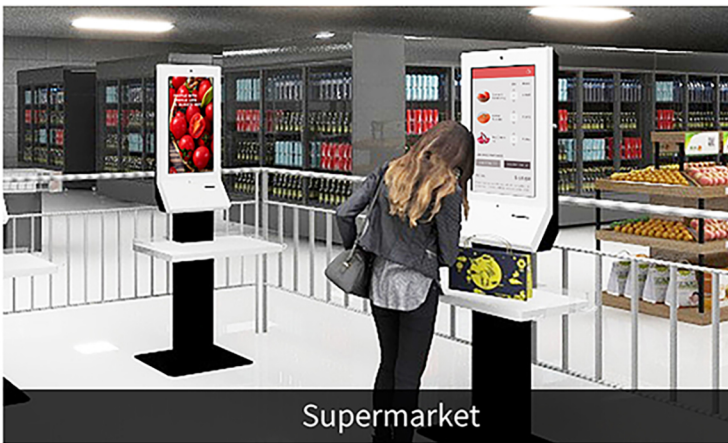

Supermarket

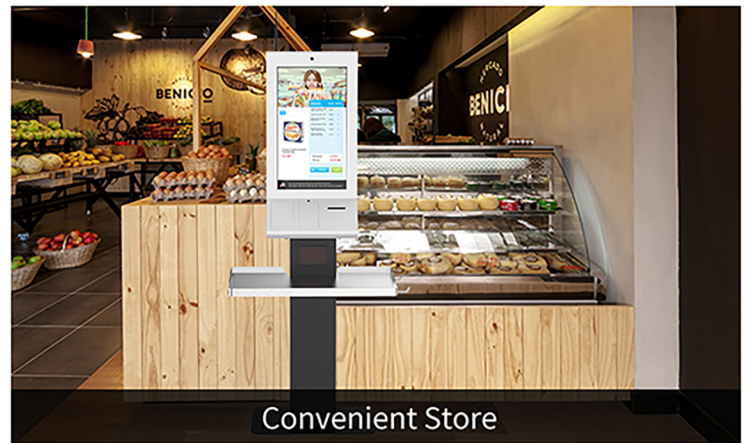

Convenient Store




Bookstore



Retail Store

SPECIFICATIONS

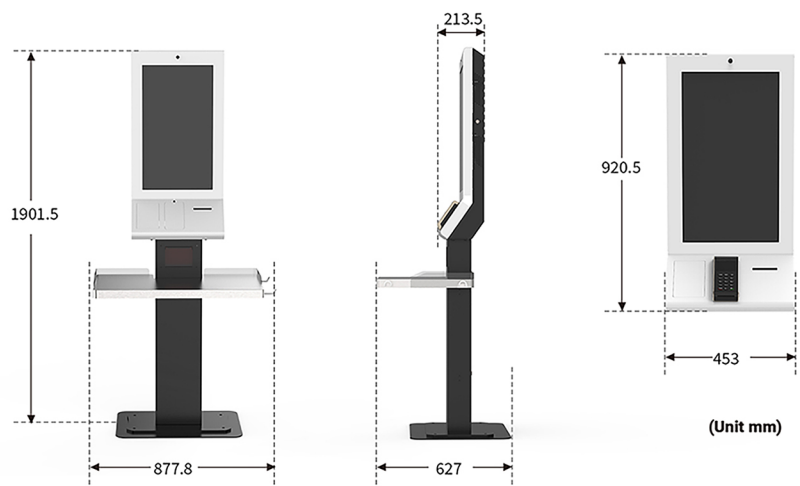

OS Support			
Operating System	WIN 10 (Trial version)	Android 7.1 and higher version	
CPU	Intel Celeron J1900 Quad-core 2G	RK3288 Cortex-A17 Quad-core, 1.8 GHz	
System Memory	4G	2G/4G	
Disk	64G/128G/256G(SSD)	8G/16G/32G/64G	
Interface			
Speaker	5W*2	5W*2	
Interface	USB*8/RJ45*1	USB*6/RJ45*1	
Network	Ethernet/WIFI	Ethernet/WIFI	
Touch Screen			
Type	PCAP 10 points	Response Time	10ms
LCD			
Type	TFT-LCD	Contrast Ratio	3000:1
Screen Size	27"	Response Time	12ms
Max Resolution	1920 x 1080	Viewing Angle	H178° V178°
Aspect Ratio	16 : 9	Display Colors	16.7M
Brightness	300 cd/m ²	Refresh Rate	60Hz
Panel Life	30000 hours		
Devices			
Printer	Thermal printer with cutter, paper roll 80mm * 80mm	Camera	2 million pixels, prime lens, 1920*1080@30fps
Scanner	2D, area-imaging scanner	Card Reader	Option
Power			
Voltage	100-240VAC , 50/60Hz	Power Consumption	<110W
Enclosure			
Material	SPCC	Surface	Powder coating
Overall Size	L627xW877.8xH1901.5mm (Flooring) L213.5xW453xH920.5mm (Wall-mounting)	Net Weight	75.75kg (Flooring) 27kg (Wall-mounting)
Package	L345xW583xH1050.5mm (Wall-mounting)	Gross Weight	35kg (Wall-mounting)
Application			
Working Temperature	0~40°C	Storage Temperature	-20~60°C
Working Humidity	20%~80%	Storage Humidity	10%~90%
Application	Indoor		



Inter-Register Communication (M) Sdn. Bhd. [198701004225 (162895-K)]

34, Jalan Tanjung SD 13/1, Bdr Sri Damansara,
52200 Kuala Lumpur.
Tel: (6)03-6272 8000 (8 Line) Fax: (6)03-6272 3210
general@irc.com.my
www.irc.com.my

Authorise Reseller :