



SELF-ORDERING KIOSK


also QUEUE KIOSK

KH-2100
KH-2100C (Countertop)

VESA mounts 75x75/100x100mm
Optional payment holder
Two mounting options: floor-standing, countertop



FEATURES



VESA standard mounting holes
(75 x 75/100 x 100mm)



21.5" touch screen signage or custom, support landscape or portrait mounting



Cable Cover
prevent wires and switch from being damaged in public places




Printer space
(L150 x W130 x H200mm)




Cable routing holes




The upper and lower parts of the stand can be freely combined or separated for different usage modes



Base plate consisting of two pieces of high strength metal

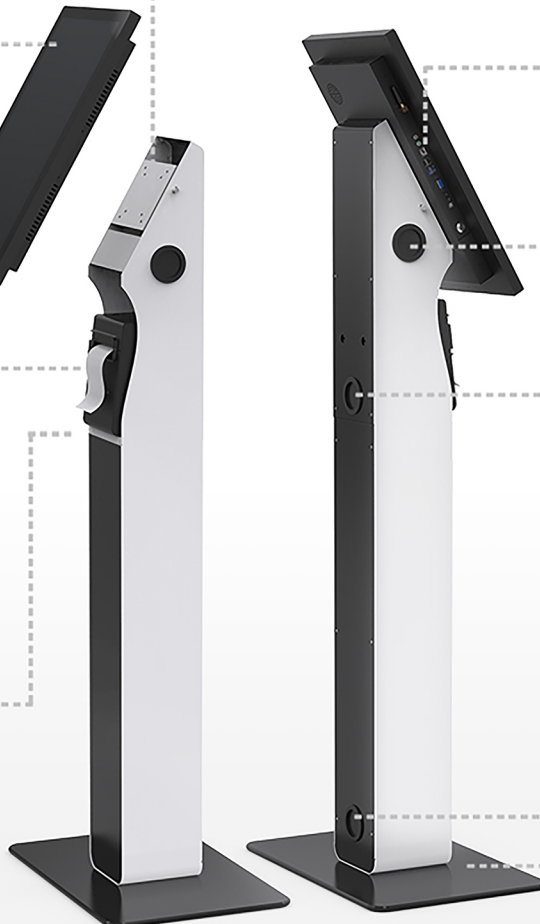

- Original IPS 1080P HD high brightness screen
- Support standard VESA, horizontal or vertical installation
- Multi-point capacitive touch technology provides rich interaction and convenient content management
- Network remote management, can transfer contents through computer, mobile phone or USB interface
- Support timing switch, network wake-up, screen dividing or multi-screen splicing display
- Flexible choices of windows and android system

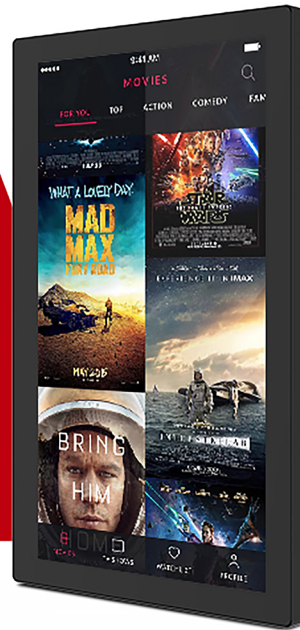

Flexible installation of floorstanding or countertop mode

The monitor stand can be disassembled into two parts. You can install the kiosk as a countertop mode as your need.



Easy Cable Management

The kiosk allows for internal cable management, which makes its surroundings clean and tidy.

APPLICATIONS




SPECIFICATIONS

For Kiosk

OS support	WIN 10 (trial version)	Android 7.1 and higher version
CPU	Intel Celeron J1900 quad-core 2.0G	RK3288 Cortex-A17 quad-core 1.8GHz
System Memory	4G	2G/4G
Disk	64G/128G/256G(SSD)	8G/16G/32G/64G
Speaker	5W*2	5W*2
Interface	USB*4/RJ45*1	USB*2/RJ45*1
Network	Ethernet/WIFI	Ethernet/WIFI

Type	21 inch (TFT-LCD)
Touchscreen	PCAP, 10 points
Max Resolution	1920x1080
Aspect Ratio	16:9
Brightness	300 cd/m2
Material	Powder-coated steel
Color	Available
Printer Space	L150 x W130 x H200 mm (Printer not provided)
Dimensions	L325 x W340 x H705 mm (Countertop) L540 x W370 x H1525 mm (Floor-standing)
Net Weight	16.5kg (Countertop) / 34kg (Floor-standing)

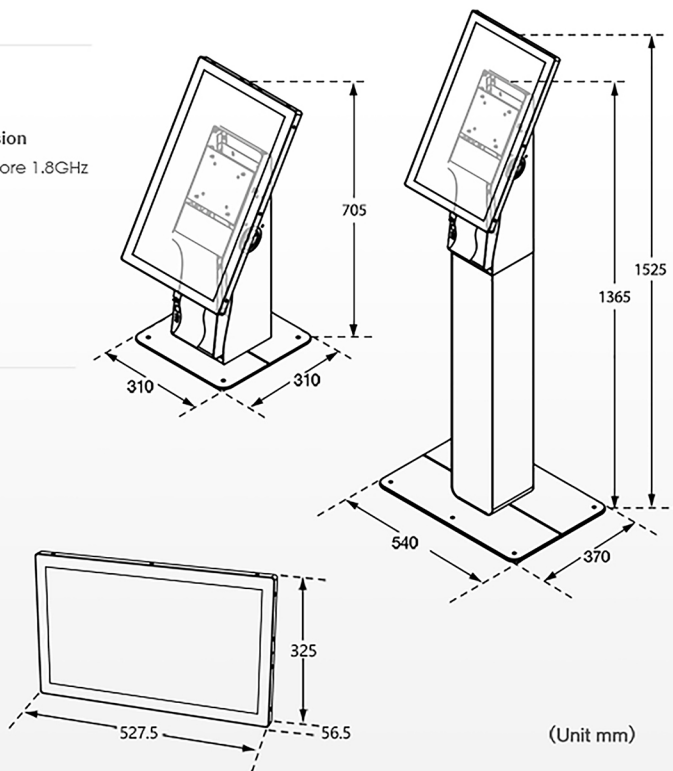

OS Support

Model	WIN 10 (trial version)	Android 7.1 and higher version
CPU	Intel Celeron J1900 quad-core 2.0G	RK3288 Cortex-A17 quad-core 1.8GHz
System Memory	4G	2G/4G
Disk	64G/128G/256G(SSD)	8G/16G/32G/64G
Speaker	5W*2	5W*2
Interface	USB*4/RJ45*1	USB*2/RJ45*1
Network	Etherner/WIFI	Etherner/WIFI

Screen

Type	Projective Capacitive Touch(10 points)
Response Time	10ms

LCD

Type	TFT-LCD
Screen Size	21.5"
Max Resolution	1920x1080
Aspect Ratio	16:9
Brightness	300cd/m ²
Panel Life	30000 hours
Contrast Ratio	3000:1
Response Time	18ms
Viewing Angle	H178° V178°
Display Colors	16.7M
Refresh Rate	60Hz

Power

Voltage	100-240VAC,50/60HZ
Power Consumption	<40W

Enclosure














Material	SPCC
Surface	Powder coating
Overall Size	L325×W340×H705(Countertop) L540×W370×H1525(Floor-standing)
Package	L595×W220×H230(Countertop stand) L897×W419×H249(Floor stand) L650×W450×H190(21.5" monitor)
Net Weight	17.5kg(Countertop) / 34kg(Floor-standing)
Gross Weight	12kg (Countertop stand) / 30kg (Floor stand) /10.5kg (21.5" monitor)

Application

Working Temperature	0~40
Working Humidity	20%~80%
Application	indoor
Storage Temperature	-20~60
Storage Humidity	10%~90%

ASSEMBLY & INSTALLATION

Packing List

 A A=1 PCS	 B B=1 PCS	 C C=2 PCS	 D D=8+2 PCS	 E E=6+2 PCS	 F F=6+2 PCS	 G G=6+2 PCS	 M M=2 PCS
		 H H=4+2 PCS	 I I=2+2 PCS	 J J=1 PCS	 K K=1 PCS	 L L=2+2 PCS	

Installation Instructions

