KH-3200

Interactive self-service ordering kiosk

FEATURES

Card reader is not provided and max size of card reader W125*L175mm

Card Reader Space

Scanner

Android 7.1 and higher version

Windows 10 (trial version)

Printer

Speaker

- Metal construction

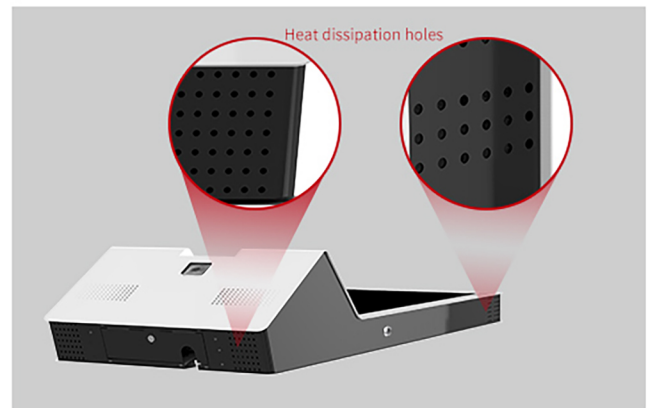- Providing with scanner & printer; designed with space for fixing card reader or other modules

- Scanner

- Flip design of lockable front cover for easy maintenance

Speaker

supporting over 30 different media player format

- Designed with two - channel speakers

Heat dissipation holes

- Holes for heat dissipation

Three USB ports; and ports for wifi & wired ethernet networking connection.

- For additional ports can be customized

- Three kinds of display ways for different applications

541mm

1893mm

1303mm

265mm

446mm

550mm
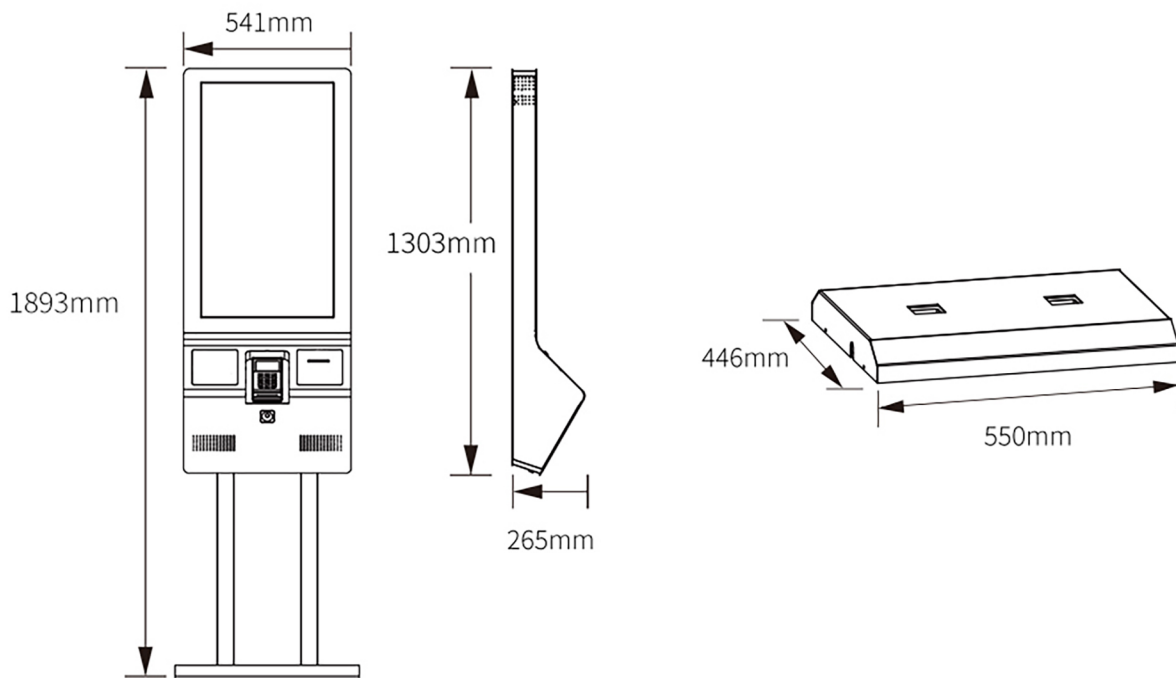
System		
OS Support	WIN 10 (trial version)	Android 7.1 and higher version
CPU	Intel Celeron J1900 Quad-core 2G	RK3288 Cortex-A17 quad-core 1.8GHz
System Memory	4G	2G/4G
Disk	64G/128G/256G(SSD)	8G/16G/32G/64G
Interface		
Speaker	5W*2	5W*2
Interface	USB*3/RJ45*1	USB*2/RJ45*1
Network	Ethernet/WIFI	Ethernet/WIFI
Touch Screen		
Type	Projective capacitive ouch (10 points)	Response time	10ms
LCD		
Type	TFT-LCD	Contrast Ratio	1100 : 1
Screen size	31.5''	Response Time	10ms
Max Resolution	1920 x 1080	Viewing Angle	H178° V178°
Aspect Ratio	16 : 9	Display Colors	16.7M
Brightness	400cd/㎡	Refresh Rate	60Hz
Panel Life	30000 hours		
Built-in Devices		
Printer	80mm thermal printer with auto cutter	Scanner	2D, area-imaging scanner
Power		
Voltage	100-240VAC 50/60HZ	Power Consumption	<120W
Enclosure		
Material	SPCC	Surface	Powder coating
Overall Size	W541*D446*H1893mm(single screen flooring)；W541*D265*H1303mm（wall mounting）		
Package	木箱W790*D535*H1950mm(single screen flooring)；木箱W790*D475*H1475mm（wall mounting）		
Net Weight	88kg(single screen flooring)；45kg（wall mounting）		
Gross Weight	128kg(single screen flooring)；85kg（wall mounting）		
Application		
Working Temperature	0～40℃	Storage Temperature	-20～60℃
Working Humidity	20%～80%	Storage Humidity	10%～90%
Application	Indoor		

Operating Instructions

Floor Standing Mounting   **Wall mounting**

a.Drill holes in the ground

4-φ16mm

280mm

220mm

b.Plug in the expansion pipes and bolts

Ground

Ground

c.Fix the bottom base on the floor

a.Metal plate for wall mounting

c.Wall mounting

d.Install the standing frame

e.Arrange the cable and Install the base cover

f.Mounting

b.Hang on the metal plate

640mm

Packing List

Product
x1

Key
x2


Power Cord
x1


Fuse Tool
x1

User Manual
x1

Options:

WIFI Antenna
x1


Socket Head Wrench
x1

Wall-mounting Plate
x1

EVA Pad
x1

Expansion Bolt
x4

Socket Head Cap Screw
x6

Tapping Screw
x8

Plastic Expansin Tube
x8

Authorise Resseller :