

PP-9745W



- XPPC continues the XPOS's DNA, keep it slim and dual-hinge design.
- Using Intel Alder Lake 12th Generation Processor & Support High-speed PCIe M.2 SSD.
- Adjustable angle and height improve the viewing angle, enhance the user experience, can also be Desktop, Pole or Wall-mounted.
- Easy for maintenance: Easy to access DRAM/ SSD/ MB.
- Shared Peripherals: Share the same peripherals with XPOS.

01/ ECO-FRIENDLY

Reduce the size and package to save the environment and for easier transportation



02/ WITH PAYMENT EFT / SCANNER

Two ways for add-on device settlement.



Arm type
Barcode Scanner



Payment Device



RFID Device

03/ 2nd Display

Arm / Pole Type for different countertop




04/ SENSOR

Ambient light sensor allows system automatically adjust the brightness of the screen according to the environment.




05/ Alder LAKE

High Performance CPU For Complex solution.

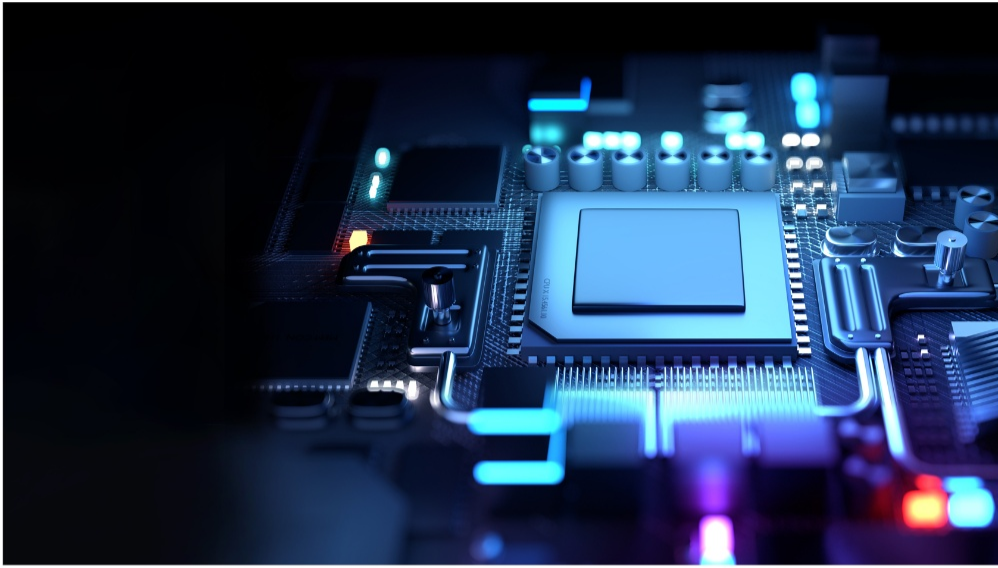


06/ A LITTLE EXTRA

Hidden adapter in base or customized I/O (by project).

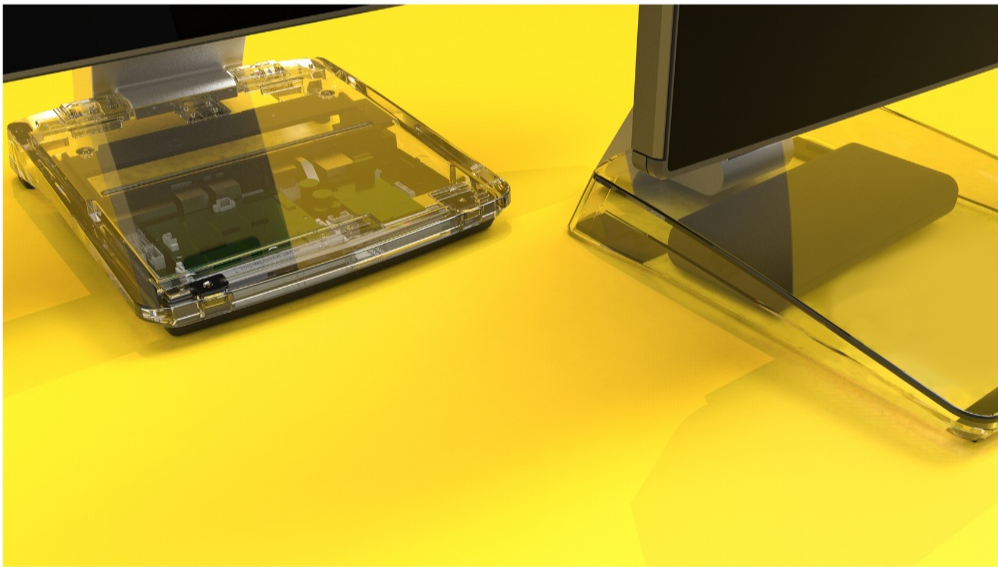


-->

Specifications



CPU

- Intel® Core™ i3-12100TE 12M Cache, up to 4.00 GHz
- Intel® Core™ i5-12500TE 18M Cache, up to 4.30 GHz



Memory

- 4GB Standard, Max 32GB (1 x So-DIMM DDR4)



Storage

- 1 x M.2 M Key (PCIe GenIII)



Connection

- 1 x M.2 E Key 802.11ac + BT4 (Optional)



Speaker

- 2 x 2W Internal Speaker



Display

- 15.6" TFT, 1920 x 1080



Touch

- True-Flat PCAP



Brightness

- 300 nits



MTBF

- 30K Hours



Camera

- 2MP Front Camera (Optional)



Power

- 20V / 90W or 20V / 130W External Adapter



OS

- Windows 10 IoT Enterprise
- Windows 11 IoT Enterprise (Est. available in Q3 2023)



TPM

- TPM2.0: dTPM and Intel PTT



Mounting

- VESA 100 x 100



Certification

- FCC / CE Class B



Appearance

- Aluminum Die-Casting + Plastic
- Galaxy Grey



Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 140 °F)



Dimensions (W x H x D)

- Product: 368 x 272.5 x 315 mm
- Carton: 468x 156 x 448 mm



Weight

- Net 3.9 kg
- Gross 4.9 kg



Port

- 3 x USB 3.0 Type A
- 1 x USB 2.0 Type A
- 1 x USB 2.0 Type A (Reserved for Add-On)
- 1 x Smart DP (Reserved for Customer Display (COM3) or 2nd Display)
- 2 x RJ45 (COM1, COM2)
- 1 x RJ45 LAN
- 1 x Smart DD
- 1 x Smart I/O (COM5)
- 1 x Video Port
- 1 x RJ11 (12V/24V)



Optional

- Universal I/O (Select 1 from below)
 - 1 x PUSB 24V (Default)
 - 1 x PUSB 12V
 - 2 x USB 2.0 Type A
 - 1 x RJ45 (COM4)



Inter-Register Communication (M) Sdn. Bhd. [198701004225 (162895-K)]

34, Jalan Tanjung SD 13/1, Bdr Sri Damansara, 52200 Kuala Lumpur.

Tel: (6)03-6272 8000 (8 Line)

Homepage: www.irc.com.my

Sales Person: (6) 019-337 4781 - Alex Wong

E-mail: general@irc.com.my