




XJ-6803 SCANNER

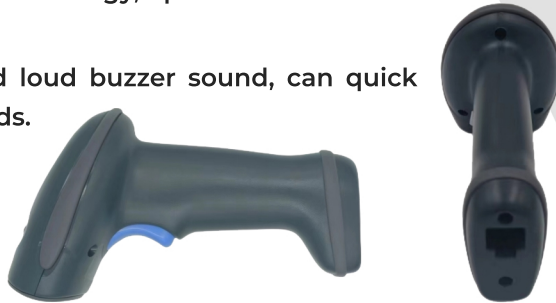

- Ready for all POS system and ideal for retail.
- With IP54 waterproof and dustproof protection.
- Plug and play, not need any driver, easy to operate.
- Ergonomic design, very comfortable operating sense.
- Using latest decoder technology, quick and fluent reading performance.
- Blue LED indicator and loud buzzer sound, can quick feedback reading records.

SPECIFICATIONS XJ-6803

Performance Parameter		
Light Source	650nm Visible red light diode	
Scanning Distance	0~280mm @ UPC/EAN 0.33mm PCS=90%	
Scan Line	Single Line	
Scan Speed	300 scan/second	
Minimum Print Contrast	≥ 30% (UPC/EAN 100%)	
Barcode Sensitivity	Pitch	±65°
	Roll	±30°
	Skew	±55°
Barcode Types	UPC/EAN/JAN,UPC-A & UPC-E,EAN-8 & EAN-13, JAN-8 & JAN-13, ISBN/ISSN, Code 39 (with full ASCII), Codabar (NW7), Code 128 & EAN 128,Code 93,Interleaved 2 of 5 (ITF),Addendum 2 of 5, IATA Code,MSI/Plessy, China Postal Code,Code 32 (Italian Pharmacode), RSS 14,RSS Limited, RSS Expanded	
Data Interface Port	RJ-45	
Mechanical and Electric Performance		
SIZE(Length x Width x Height)	173mm*67mm*94mm	
Weight (without cable)	220g	
Indicator	Beeper and LED Light	
Communication interface	HID USB、USB Virtual COM、RS-232	
Input voltage	5VDC±10%	
Working Current	85mA	
Environmental Parameter		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	5% ~ 95%	
Drop Resistance	1.5M	
IP Rating	IP52	
EMC	CE EN55022 B, FCC Part 15 Class B, VCCI, BSMI	
Laser Safety	CDRH Class IIa, IEC 60825-1 Class 1	
Certificates		
CE,RoHS,EMC,LVD, ISO9001:2008, ISO14001:2004		



Inter-Register Communication (M) Sdn. Bhd. [198701004225 (162895-K)]

34, Jalan Tanjung SD 13/1, Bdr Sri Damansara, 52200 Kuala Lumpur.

Tel: (6)03-6272 8000 (8 Line)

Homepage: www.irc.com.my

Sales Person: (6) 019-337 4781 - Alex Wong

E-mail: general@irc.com.my