

PP-9667



FEC has completely redesigned our newest Panel PCs. AerPPC offers selections of Intel® Celeron®, Core i3 or Core i5 processors and features a modular design allowing it to be wall mounted or integrated with a base.

01/ Modular Design

All of the components can be accessed and removed without complicated procedures. The design is incredibly easy to understand with makes service and upgrades very efficient.




02/ MSR



03/ Add-On Device

We offer MSR, iButton, fingerprint, RFID readers. We also offer 2in 1 add-on devices with the MSR reader combined with iButton, fingerprint or RFID reader.

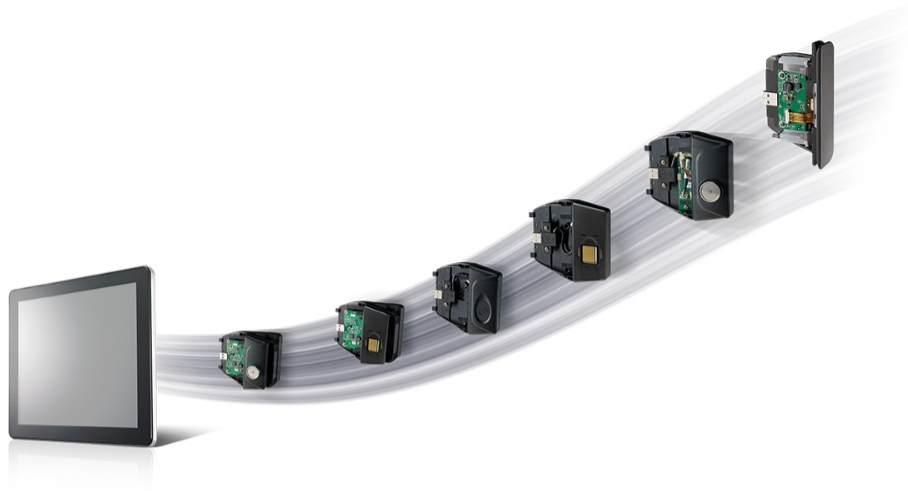


04/ Integrated Customer Display

The fully integrated customer display was designed to blend in seamlessly with AerPPC. Designed with a ball joint, the display can be easily maneuvered to face many angles.




Specifications



CPU

- Intel® Celeron® G3900TE, 2.3Ghz
- Intel® Core i3-7101TE, 3.4Ghz
- Intel® Core i5-7500T, 2.7Ghz
- Intel® Core i7-7700T, 2.9Ghz



Memory

- 4GB Standard, Max 32GB (2 x So-DIMM DDR4)



Storage

- 1 x 2.5" SATA HDD or SSD
- 1 x M.2 Storage (Optional)



Speaker

- 2 x 2W Internal Speaker



Display

- 17" TFT, 1280 x 1024



Touch

- True-Flat PCAP



Brightness

- 350 nits



MTBF

- 30K Hours



Power

- 12V / 150W External Adapter



OS

- Windows 10



Mounting

- VESA 100 x 100 mm



Certification

- FCC / CE Class B



Appearance

- Aluminum Die-casting + Plastic
- Black with Silver Trim



Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 130 °F)



Dimensions (W x H x D)

- Product: 410 x 364 x 250 mm
- Carton: 548 x 540 x 360 mm



Weight

- Net: 7.5 Kg
- Gross: 10.8 Kg



Port

- 2 x DB9 (COM1 & COM2), 1 x RJ45 (COM4)
- 4 x USB 2.0 Type A
- 1 x RJ11 Cash Drawer (12V)
- 1 x Bi-directional Parallel Port
- 1 x PS/2 Keyboard / Mouse
- 1 x RJ45 GigaLAN
- 1 x Line Out
- 1 x VGA (5V/12V jumper setting)
- 1 x 12V DC Input
- 1 x 12V DC Jack 2.5 mm Output

- Side I/O Interface:
1 x USB 2.0 Type A



Optional

- Type A: 2 x RJ45 (COM A & COM B) RS232 with RI / 5V / 12V Selectable; 1 x 24V DC Output; 1 x Mic-in
- Type B: 2 x RJ45 (COM A & COM B) RS232 with RI / 5V / 12V Selectable; 1 x 24V PUSB; 1 x Mic-in
- Type C: 2 x RJ45 (COM A & COM B) RS232 with RI / 5V / 12V Selectable; 1 x PUSB 12V; 1 x Mic-in
- Type E: 2 x Cash Drawer 24V ; 1 x Mic-in
- Type G: 3 x PUSB 12V
- Type H: 2 x PUSB 12V, 1 x PUSB 24V
- Type L: 1 x RJ45 (10/100) LAN, 2 x USB 2.0