

# XC-569



XComp is a high performance box pc being powered by Intel® 8th and 9th generation Celeron®, Core™ i3 and i5 processors. With the maximum optional I/O configuration, XComp is a perfect choice for the massive I/O port and power supply requirements of a retail point of sale pc. XComp can also be configured with only the essential I/O and become a perfect fit as a backend server pc.


## 01/ Small Form Factor Enables Flexible Installation Options

Xcomp can be placed vertically or horizontally in small spaces on or under the counter to optimize counter space, serviceability and cable management.



## 02/ Small But Powerful

Small 4.5L (295mmW/210mmD/73mmH) size enables installation in small spaces, yet is powerful enough to take on big server jobs.

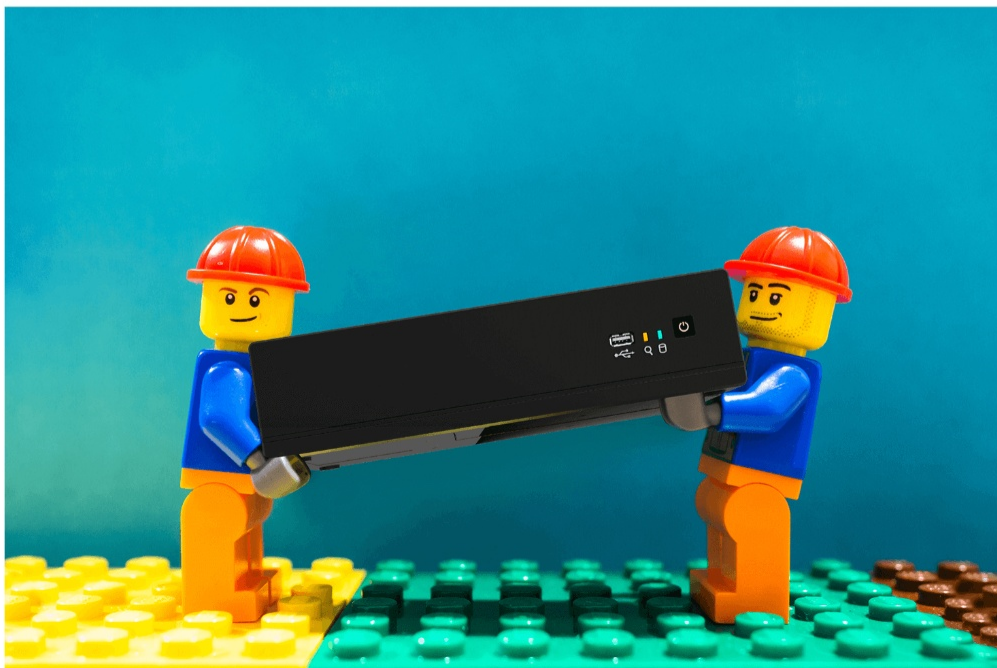


## 03/ Push Media player



## 04/ Back-Office Server

Xcomp is a great solution when in-store server capacity is required to expand edge computing.

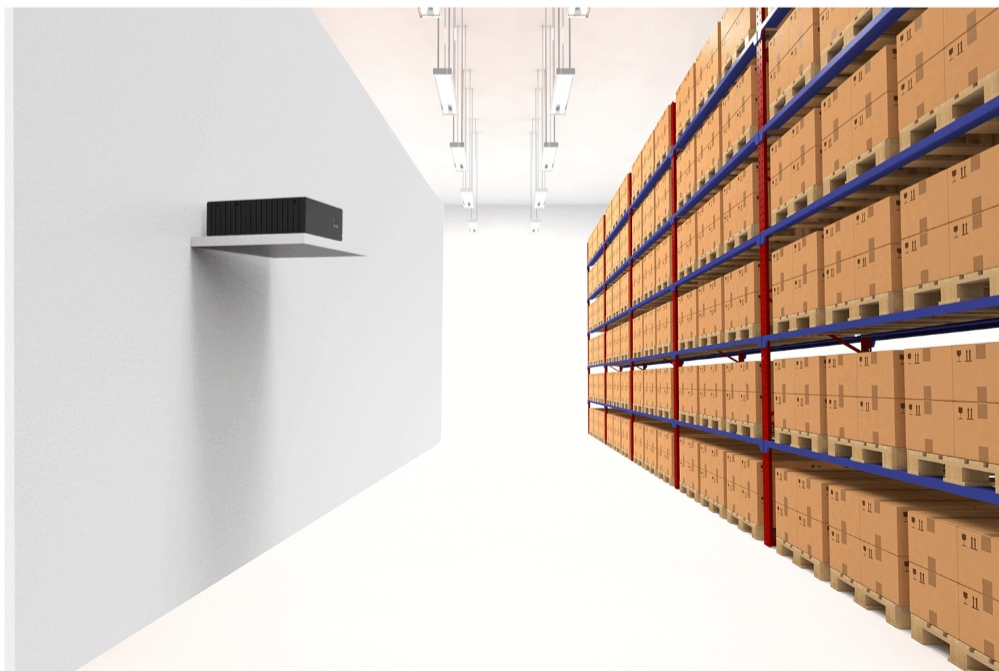

## 05/ KIOSK Engine

Xcomp can support media-intensive and other with high-demand kiosk applications.



## 06/ Highly Serviceable

Easy access to memory and storage minimizes mean-time-to-repair for storage corruptions and other service issues.




## 07/ Small Form Factor, But Big I/O Support

Modular I/O enables from simple IO support to the most demanding use cases, Xcomp has you covered.




# Specifications



## CPU

- Intel® Celeron® G4900T 2M Cache, 2.90 GHz
- Intel® Celeron® G5400T 4M Cache, 3.10 GHz
- Intel® Core™ i3 9100TE 6M Cache, up to 3.20 GHz
- Intel® Core™ i5 9500T 9M Cache, up to 3.60 GHz



## Memory

- 4GB Standard, Max 32GB (2 x So-DIMM DDR4)



## Storage

- 2 x M.2 M Key Storage



## Connection

- WIFI 802.11 ac & BT 4.2 (Optional)



## Power

- 250W PSU, up to 85% Efficiency



## OS

- Windows 10 Pro
- Windows 10 IoT Enterprise
- Windows Server 2016
- Windows Server 2019



## Mounting

- VESA 100 x 100 mm



## Certification

- FCC / CE Class B



## Appearance

- Black



## Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 130 °F)



## Dimensions (W x H x D)

- 210 x 295 x 73 mm



## Weight

- Net: 4.15 Kg
- Gross: 5.2 Kg



## Port

- 1 x RJ45 (COM1) RS232
- 4 x DB9 (COM2, COM3, COM4, COM5) RS232
- 6 x USB Type A (4 x USB 2.0, 2 x USB 3.1)
- 1 x PUSB 24V
- 1 x USB DP
- 1 x Video
- 1 x RJ45 GigaLAN
  
- Front I/O:  
1 x USB 2.0 Type A
- Internal I/O:  
1 x USB 2.0 Type A



## Optional

- PUSB Board:  
5 x PUSB 12V  
2 x USB 2.0 Type A
- Audio Board:  
1 x RJ11 (12V/24V) Supports Two Cash Drawers  
1 x Line-out  
1 x Line-in  
1 x Mic-in