

# XP-3682W




XPOS is a modern and powerful point of sale system designed with Intel® 7th generation Celeron®, Core™ i3 and Core™ i5 processors.

## 01/ Flexible

High / Low Profile

## 02/ Extendable

Dock the second display on the system or extend the display out on a flat surface.

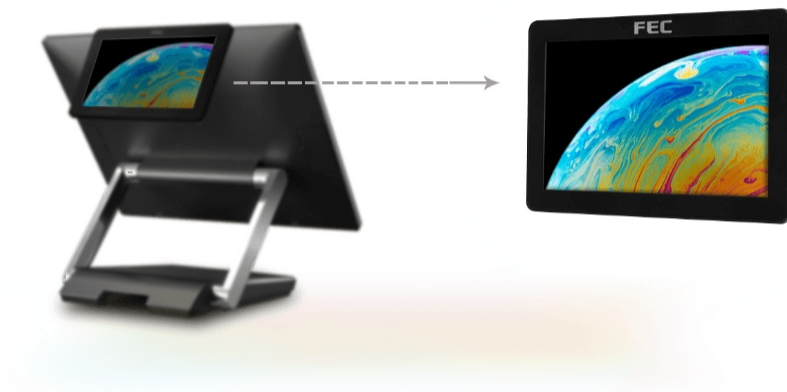


## 03/ Slim



## 04/ Suitable for multiple applications




# Specifications



## CPU

- Intel® Celeron® 3965U 2M Cache, 2.20 GHz
- Intel Core™ i3 7100U 3M Cache, 2.40 GHz
- Intel Core™ i5 7300U 3M Cache, up to 3.50 GHz



## Memory

- 4GB Standard, Max 32GB (2 x So-DIMM DDR4)



## Storage

- 2 x M.2 M Key (SATA III or PCIe)
- \*(Celeron® Supports Only One PCIe Storage Device )




## Connection

- 2 x M.2 E Key 802.11ac + BT (Optional)



## Speaker

- 2 x 2W Internal Speaker



## Display

- 21.5" TFT, 1920 x 1080



## Touch

- True-Flat PCAP



## Brightness

- 250 nits



## MTBF

- 50K Hours



## Camera

- 2MP Front Camera (Optional)



## Power

- 20V / 90W or 20V / 130W External Adapter



## OS

- Windows 10 Pro
- Windows 10 IoT Enterprise



## Mounting

- VESA 100 x 100 mm



## Certification

- FCC / CE Class B




## Appearance

- Aluminum Die-Casting + Plastic
- Galaxy Grey



## Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 130 °F)



### Dimensions (W x H x D)

- Product: 513 x 380 x 231.75 mm
- Carton: 652 x 463 x 212 mm



### Weight

- Net: 7.2 Kg
- Gross: 8.9 Kg



### Port

- 1 x USB 3.0 Type A
- 1 x USB 2.0 Type A (Reserved for Add-On)
- 1 x USB DP (Reserved for 2nd Display)
- 1 x Smart DP ( Reserved for Customer Display or 2nd Display)



### Optional

- 2 x RJ45 (COM3, COM4) RS232
- 4 x USB 2.0 Type A
- 1 x USB DP (2nd Display)
- 1 x RJ11 (12V / 24V)
- 1 x RJ45 LAN
- 1 x 20V DC-in



### I/O on Base

- 2 x RJ45 (COM3, COM4) RS232
- 4 x USB 2.0 Type A
- 1 x USB DP (2nd Display)
- 1 x RJ11 (12V / 24V)
- 1 x RJ45 LAN
- 1 x 20V DC-in