

XP-3687




XPOS is a modern and powerful point of sale system designed with Intel® 7th generation Celeron®, Core™ i3 and Core™ i5 processors.

01/ Flexible

High / Low Profile

02/ Extendable

Dock the second display on the system or extend the display out on a flat surface.

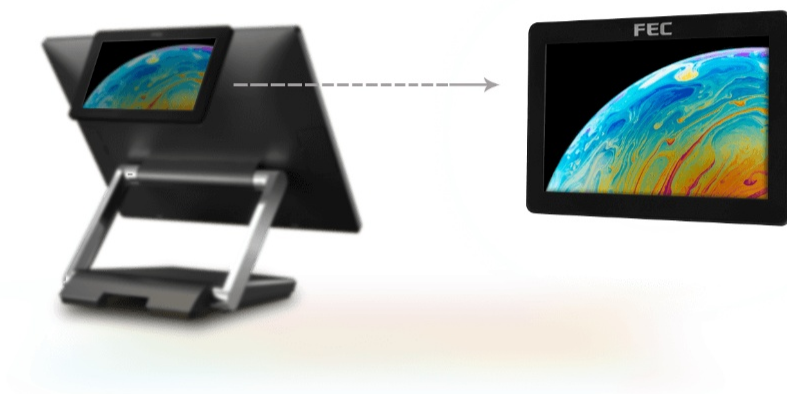


03/ Slim



04/ Suitable for multiple applications



Specifications



CPU

- Intel® Celeron® 3965U 2M Cache, 2.20 GHz
- Intel Core™ i3 7100U 3M Cache, 2.40 GHz
- Intel Core™ i5 7300U 3M Cache, up to 3.50 GHz



Memory

- 4GB Standard, Max 32GB (2 x So-DIMM DDR4)



Storage

- 2 x M.2 M Key (SATA III or PCIe)
- *(Celeron® Supports Only One PCIe Storage Device)



Connection

- 2 x M.2 E Key 802.11ac + BT (Optional)



Speaker

- 2 x 2W Internal Speaker



Display

- 17" TFT , 1280 x 1024



Touch

- True-Flat PCAP



Brightness

- 400 nits



MTBF

- 50K Hours



Camera

- 2MP Front Camera (Optional)



Power

- 20V / 90W or 20V / 130W External Adapter



OS

- Windows 10 Pro
- Windows 10 IoT Enterprise



Mounting

- VESA 100 x 100 mm



Certification

- FCC / CE Class B



Appearance

- Aluminum Die-Casting + Plastic
- Galaxy Grey
- Silver



Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 130 °F)



Dimensions (W x H x D)

- Product: 380.5 x 330 x 231.74 mm
- Carton: 492 x 168 x 488 mm



Weight

- Net: 5.7 Kg
- Gross: 7.4 Kg



Port

- 1 x USB 3.0 Type A
- 1 x USB 2.0 Type A (Reserved for Add-On)
- 1 x USB DP (Reserved for 2nd Display)
- 1 x Smart DP (Reserved for Customer Display or 2nd Display)



I/O on Base

- 2 x RJ45 (COM3, COM4) RS232
- 4 x USB 2.0 Type A
- 1 x USB DP (2nd Display)
- 1 x RJ11 (12V / 24V)
- 1 x RJ45 LAN
- 1 x 20V DC-in



Inter-Register Communication (M) Sdn. Bhd. [198701004225 (162895-K)]

34, Jalan Tanjung SD 13/1, Bdr Sri Damansara, 52200 Kuala Lumpur.

Tel: (6)03-6272 8000 (8 Line)

Homepage: www.irc.com.my

Sales Person: (6) 019-337 4781 - Alex Wong

E-mail: general@irc.com.my