

# XP-4685W (B)



## 01/ Two Height of Your Choice




## 02/ No Worry About Understaffed

XP-4685B can be rotated 180 degrees and turn into Kiosk mode.




## 03/ Intergration Base

Hidden all cable and adapter under the base and with fanless and cooling desing, no worry about overheat.

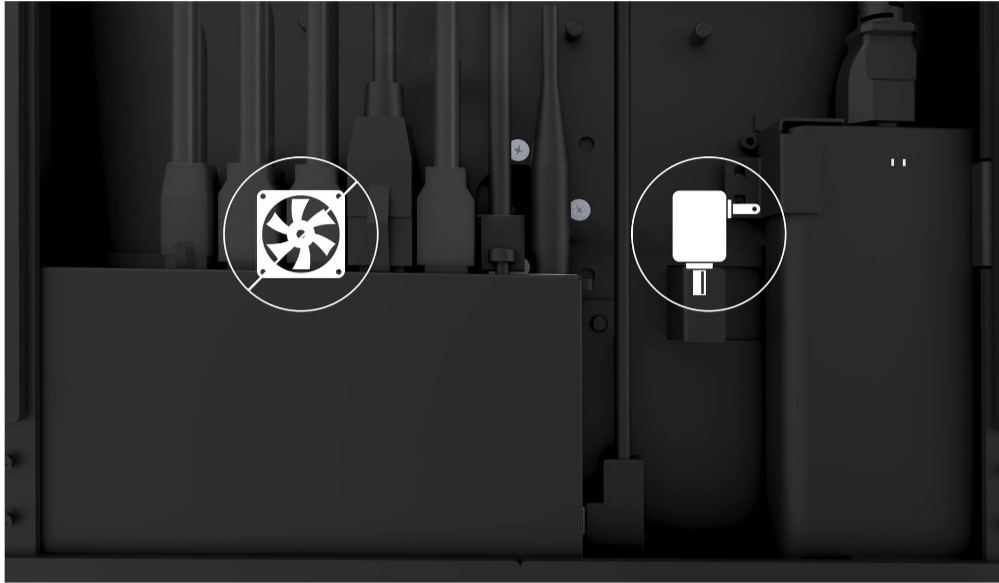

# Specifications



## CPU

- Intel® Celeron® 3965U 2M Cache, 2.20 GHz
- Intel Core™ i3 7100U 3M Cache, 2.40 GHz
- Intel Core™ i5 7300U 3M Cache, up to 3.50 GHz



## Memory

- 4GB Standard, Max 32GB (2 x So-DIMM DDR4)



## Storage

- 2 x M.2 M Key (SATA III or PCIe)
- \*(Celeron® Supports Only One PCIe Storage Device )




## Connection

- 2 x M.2 E Key 802.11ac + BT (Optional)



## Speaker

- 2 x 2W Internal Speaker



## Display

- 15.6" TFT , 1920 x 1080



## Touch

- True-Flat PCAP



## Brightness

- 400 nits



## MTBF

- 50K Hours



## Camera

- 2MP Front Camera (Optional)



## Power

- 20V / 90W or 20V / 130W External Adapter



## OS

- Windows 10 Pro
- Windows 10 IoT Enterprise



## Mounting

- VESA 100 x 100 mm



## Certification

- FCC / CE Class B



## Appearance

- Aluminum Die-Casting + Plastic
- Black



## Temperature

- Operation: 0 °C ~ 40 °C (32 °F ~ 104 °F)
- Storage: -20 °C ~ 60 °C (-4 °F ~ 130 °F)



## Dimensions (W x H x D)

- Product: 295 x 197 x 350 mm



## Weight

- Net: 4 Kg
- Gross: 5 Kg



## Port

- 1 x USB 3.0 Type A
- 1 x USB 2.0 Type A (Reserved for Add-On)
- 1 x USB DP (Reserved for 2nd Display)
- 1 x Smart DP ( Reserved for Customer Display or 2nd Display)



## I/O on Base

- 2 x RJ45 (COM3, COM4) RS232
- 4 x USB 2.0 Type A
- 1 x USB DP (2nd Display)
- 1 x RJ11 (12V / 24V)
- 1 x RJ45 LAN
- 1 x 20V DC-in



**Inter-Register Communication (M) Sdn. Bhd.** [ 198701004225 (162895-K) ]

34, Jalan Tanjung SD 13/1, Bdr Sri Damansara, 52200 Kuala Lumpur.

**Tel:** (6)03-6272 8000 (8 Line)

**Homepage:** [www.irc.com.my](http://www.irc.com.my)

**Sales Person:** (6) 019-337 4781 - Alex Wong

**E-mail:** [general@irc.com.my](mailto:general@irc.com.my)